

Silsaving


Frese alte prestazioni

895S


Visit the online
Product Sheet

895SW D. 6 CR05

4 flute end mill regular version with variable helix and unequal flute spacing

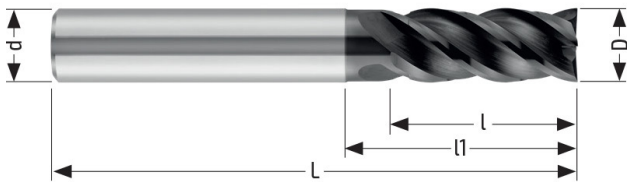

6527 L

 $\lambda 38^\circ$
 $\lambda 40^\circ$ 

Cr

Details

Diameter of cutting edge D h10	6,00
Shank Diameter d h6	6,00
Overall Length L	57
Cutting length l	13,00
Neck Relief Length l1	20,0
Neck Relief Depth a	0,15
Corner Radius/Radius Cr/r	0,50
Number of Flutes Z	4
Shank references standard Shank ref.	HB

Materials

Steel < 800 n/mm ²	
Steel < 1000 n/mm ²	
Steel < 1300 n/mm ²	
Grey cast iron	

Coatings

Balinit® Alcrona (HMG)

Alternative Coatings

Series normal



This tool is available in 11 diameters.

Please consider the environment, before printing this document.