

HM

HRC

05220



Frese per stampi



Visit the online
Product Sheet

F05220H00050005

2 flute ball nose end mill for ribbing with tapered neck and reinforced shank

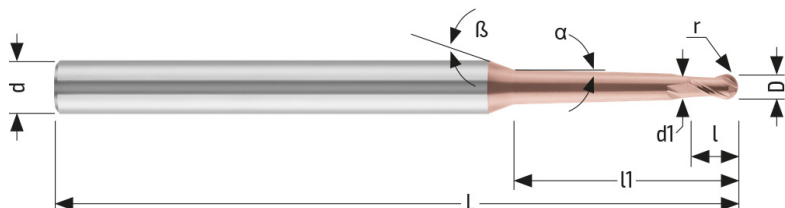

Details

Diameter of cutting edge D +0/-0,02	0,50
Corner Radius/Radius Cr/r	0,25
Cutting length l	0,35
Neck Relief Length l1	10,0
Neck diameter d1	0,45
Neck Angle α	0,9
Engaged Angle β	15,0
Overall Length L	50
Shank Diameter d h6	6,00
ε 0,5°	
ε 0,5°	4,05
ε 1,0°	
ε 1,0°	10,17
ε 2,0°	
ε 2,0°	10,91
ε 3,0°	
ε 3,0°	11,78
Number of Flutes Z	2

Materials

Hardened steel 42 ÷ 52 HRC	
Hardened steel 52 to 62 HRC	

Coatings

Balinit® Tisaflex (HMH)

Alternative Coatings

Shank references standard
Rif. gambo HA

This tool is available in 9 diameters.

 Please consider the environment, before printing this document.