

HM

HRC

06210


Frese per stampi



Visit the online
Product Sheet

F06210H00050009

2 flute corner radius end mill for ribbing with reinforced shank

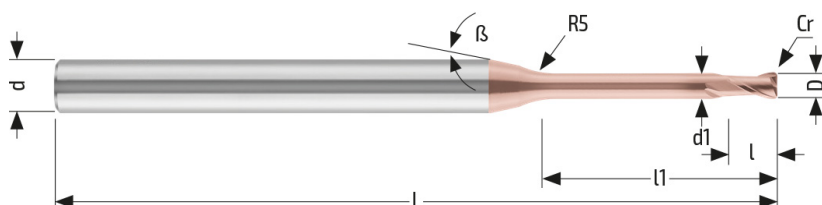

Silmax
NORM

λ 30°



Cr

Details

Diameter of cutting edge D +0/-0,02	0,50
Corner Radius/Radius Cr/r	0,05
Cutting length l	0,75
Neck Relief Length l1	3,0
Neck diameter d1	0,45
Engaged Angle β	12,0
Overall Length L	50
Shank Diameter d h6	6,00
ε 0,5°	
ε 0,5°	3,74
ε 1,0°	
ε 1,0°	3,94
ε 2,0°	
ε 2,0°	4,28
ε 3,0°	
ε 3,0°	4,57
Number of Flutes Z	2
Shank references standard Rif. gambo	HA

Materials

Hardened steel 42 ÷ 52 HRC

Hardened steel 52 to 62 HRC

Coatings

Balinit® Tisaflex (HMH)

Alternative Coatings

This tool is available in 9 diameters.

 Please consider the environment, before printing this document.