

HM

HRC

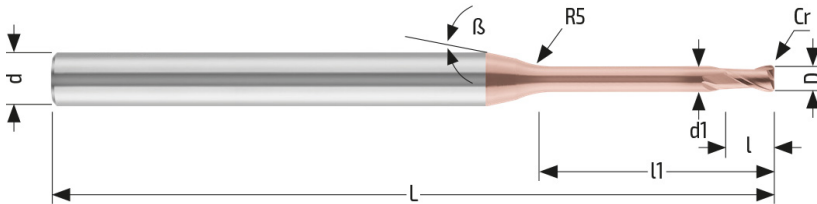
06210

Frese per stampi

Visit the online
Product Sheet

F06210H00120010

2 flute corner radius end mill for ribbing with reinforced shank

Silmax
NORM

λ 30°



R5



Cr

Details

Diameter of cutting edge D +0/-0,02	1,20
Corner Radius/Radius Cr/r	0,10
Cutting length l	1,80
Neck Relief Length l1	8,0
Neck diameter d1	1,15
Engaged Angle β	12,0
Overall Length L	50
Shank Diameter d h6	6,00
ε 0,5°	
ε 0,5°	8,99
ε 1,0°	
ε 1,0°	9,32
ε 2,0°	
ε 2,0°	9,83
ε 3,0°	
ε 3,0°	10,24
Number of Flutes Z	2
Shank references standard Rif. gambo	HA

Materials

Hardened steel 42 ÷ 52 HRC

Hardened steel 52 to 62 HRC

Coatings

Balinit® Tisaflex (HMH)

Alternative Coatings

This tool is available in 9 diameters.

 Please consider the environment, before printing this document.