

HM

HRC

06210


Frese per stampi



Visit the online
Product Sheet

F06210H00150005

2 flute corner radius end mill for ribbing with reinforced shank

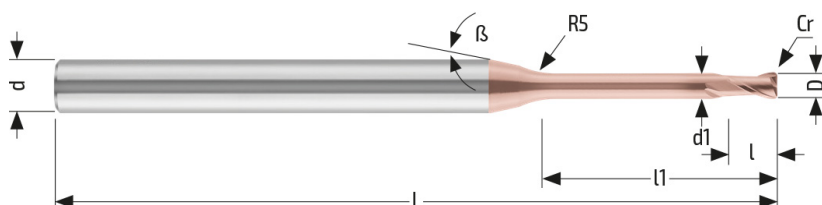

Silmax
NORM

λ 30°



Cr

Details

Diameter of cutting edge D +0/-0,02	1,50
Corner Radius/Radius Cr/r	0,20
Cutting length l	2,25
Neck Relief Length l1	20,0
Neck diameter d1	1,45
Engaged Angle β	15,0
Overall Length L	60
Shank Diameter d h6	6,00
ε 0,5°	
ε 0,5°	21,42
ε 1,0°	
ε 1,0°	21,95
ε 2,0°	
ε 2,0°	22,70
ε 3,0°	
ε 3,0°	23,26
Number of Flutes Z	2
Shank references standard Rif. gambo	HA

Materials

Hardened steel 42 ÷ 52 HRC



Hardened steel 52 to 62 HRC



Coatings

Balinit® Tisaflex (HMH)

Alternative Coatings

This tool is available in 9 diameters.

 Please consider the environment, before printing this document.