

HM

HRC

06210


Frese per stampi



Visit the online
Product Sheet

F06210H00250003

2 flute corner radius end mill for ribbing with reinforced shank

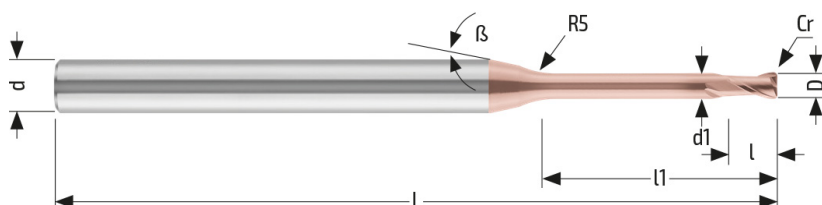

Silmax
NORM

λ 30°



Cr

Details

Diameter of cutting edge D +0/-0,02	2,50
Corner Radius/Radius Cr/r	0,20
Cutting length l	3,75
Neck Relief Length l1	12,0
Neck diameter d1	2,40
Engaged Angle β	12,0
Overall Length L	60
Shank Diameter d h6	6,00
ε 0,5°	
ε 0,5°	13,23
ε 1,0°	
ε 1,0°	13,61
ε 2,0°	
ε 2,0°	14,18
ε 3,0°	
ε 3,0°	14,64
Number of Flutes Z	2
Shank references standard Rif. gambo	HA

Materials

Hardened steel 42 ÷ 52 HRC

Hardened steel 52 to 62 HRC

Coatings

Balinit® Tisaflex (HMH)

Alternative Coatings

This tool is available in 9 diameters.

 Please consider the environment, before printing this document.