

HM

HRC

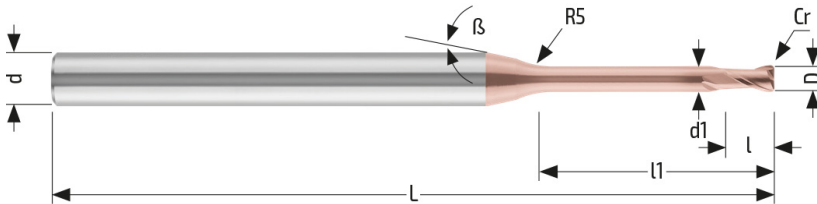
07210

Frese per stampi

Visit the online
Product Sheet

F07210H00200050

2 flute corner radius end mill for ribbing

Silmax
NORM

λ 30°



Cr

Details

Diameter of cutting edge D +0/-0,02	2,00
Corner Radius/Radius Cr/r	0,50
Cutting length l	3,00
Neck Relief Length l1	10,0
Neck diameter d1	1,90
Engaged Angle β	12,0
Overall Length L	50
Shank Diameter d h6	4,00
ε 0,5°	
ε 0,5°	11,17
ε 1,0°	
ε 1,0°	11,51
ε 2,0°	
ε 2,0°	12,04
ε 3,0°	
ε 3,0°	12,47
Number of Flutes Z	2
Shank references standard Rif. gambo	HA

Materials

Hardened steel 42 ÷ 52 HRC

Hardened steel 52 to 62 HRC

Coatings

Balinit® Tisaflex (HMH)

Alternative Coatings

This tool is available in 8 diameters.

 Please consider the environment, before printing this document.