

HM

HRC

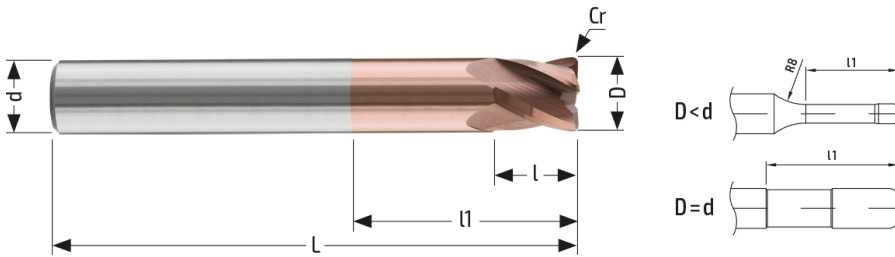
T142

Frese per stampi

Visit the online  
Product Sheet

# F11420H00250105

4 flute end mill for semi-finishing and finishing

Silmax  
NORM $\lambda 30^\circ$ 

## Details

|                                         |      |
|-----------------------------------------|------|
| Diameter of cutting edge<br>D h8        | 2,50 |
| Corner Radius/Radius<br>Cr/r            | 1,00 |
| Cutting length<br>l                     | 3,50 |
| Neck Relief Length<br>l1                | 14,0 |
| Neck Relief Depth<br>a                  | 0,05 |
| Overall Length<br>L                     | 50   |
| Shank Diameter<br>d h5                  | 4,00 |
| Number of Flutes<br>Z                   | 4    |
| Shank references standard<br>Rif. gambo | HA   |

## Materials

|                                |  |
|--------------------------------|--|
| Steel < 800 n/mm <sup>2</sup>  |  |
| Steel < 1000 n/mm <sup>2</sup> |  |
| Steel < 1300 n/mm <sup>2</sup> |  |
| Grey cast iron                 |  |
| Spheroidal cast iron           |  |

## Coatings

Balinit® Tisaflex (HMH)

## Alternative Coatings

## Series normal



This tool is available in 12 diameters.



Please consider the environment, before printing this document.