

HM

HRC

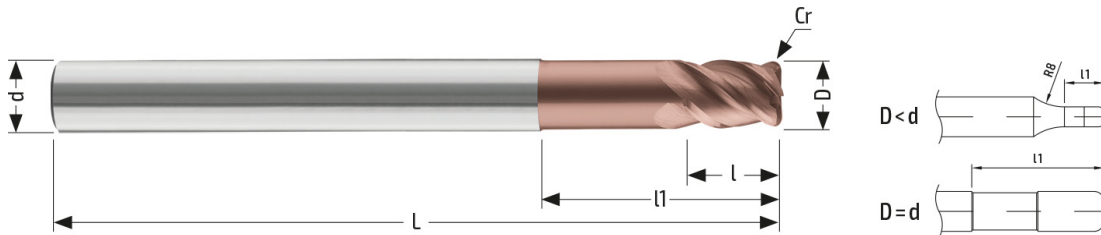

1144S

Frese per stampi

Visit the online
Product Sheet

F1144SH00100004

4 Flutes corner radius end mill unequal flute spacing for roughing
with neck relief

Silmax
NORM $\lambda 42^\circ$
 $\lambda 44^\circ$ 

Cr

Details

Diameter of cutting edge D h6	1,00
Corner Radius/Radius Cr/r	0,20
Cutting length l	1,00
Neck Relief Length l1	10,0
Neck Relief Depth a	0,03
Overall Length L	78
Shank Diameter d h5	6,00
Number of Flutes Z	4
Shank references standard Rif. gambo	HA

Materials

Hardened steel 42 ÷ 52 HRC

Hardened steel 52 to 62 HRC

Coatings

Balinit® Tisaflex (HMH)

Alternative Coatings

Series long



This tool is available in 11 diameters.

Please consider the environment, before printing this document.