

HM

HRC

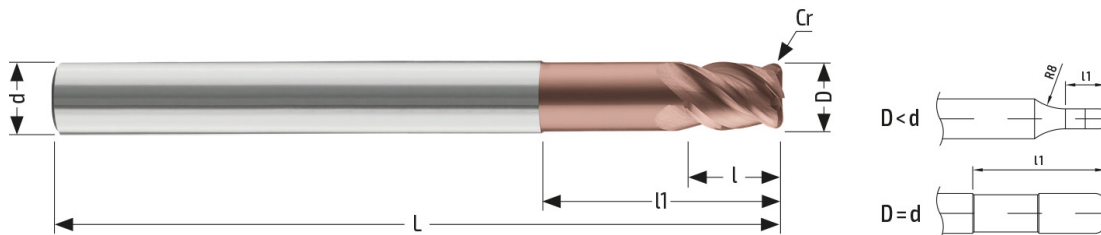

1144S

Frese per stampi

Visit the online  
Product Sheet

# F1144SH00500005

4 Flutes corner radius end mill unequal flute spacing for roughing  
with neck relief

Silmax  
NORM $\lambda 42^\circ$   
 $\lambda 44^\circ$ 

## Details

|                                         |      |
|-----------------------------------------|------|
| Diameter of cutting edge<br>D h6        | 5,00 |
| Corner Radius/Radius<br>Cr/r            | 1,20 |
| Cutting length<br>l                     | 5,00 |
| Neck Relief Length<br>l1                | 40,0 |
| Neck Relief Depth<br>a                  | 0,05 |
| Overall Length<br>L                     | 78   |
| Shank Diameter<br>d h5                  | 6,00 |
| Number of Flutes<br>Z                   | 4    |
| Shank references standard<br>Rif. gambo | HA   |

## Materials

Hardened steel 42 ÷ 52 HRC

Hardened steel 52 to 62 HRC

## Coatings

Balinit® Tisaflex (HMH)

## Alternative Coatings

## Series long



This tool is available in 11 diameters.

Please consider the environment, before printing this document.