



Visit the online  
Product Sheet

HM


TIS

1192H

Frese per titanio, superleghe e acciaio inox


# F11920H02500001

5 flute end mill 2xD with unequal flute spacing for dynamic milling

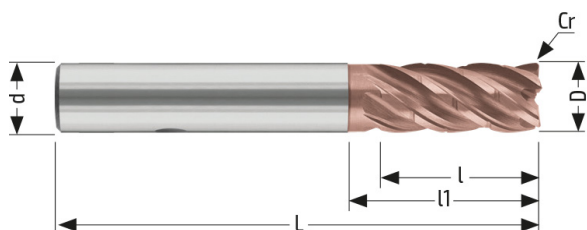

6527 L  
6528

$\lambda$  38°



2xD



## Details

|                           |       |
|---------------------------|-------|
| Diameter of cutting edge  |       |
| D h10                     | 25,00 |
| Shank Diameter            |       |
| d h5                      | 25,00 |
| Overall Length            |       |
| L                         | 124   |
| Cutting length            |       |
| l                         | 45,00 |
| Neck Relief Length        |       |
| l1                        | 65,0  |
| Neck Relief Depth         |       |
| a                         | 0,25  |
| Corner Radius/Radius      |       |
| Cr/r                      | 1,00  |
| Number of Flutes          |       |
| Z                         | 5     |
| Shank references standard |       |
| Shank ref.                | HB    |

## Materials

|                            |  |
|----------------------------|--|
| Ferritic/Martensitic steel |  |
| Austenitic steel           |  |
| PH Duplex                  |  |
| Titanium                   |  |

## Coatings

Balinit® Tisaflex (HMH)

## Alternative Coatings

## Series long



This tool is available in 7 diameters.

Please consider the environment, before printing this document.