

HM

ALU

125


Frese per leghe leggere



Visit the online
Product Sheet


HMA125080CR10

3 flute end mill, regular version with unequal flute spacing

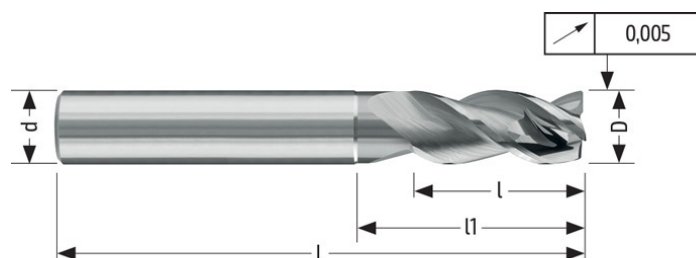

Silmax
NORM

$\lambda 42^\circ$



Cr

Details

Diameter of cutting edge	
D h6	8,00
Shank Diameter	
d h6	8,00
Overall Length	
L	63
Cutting length	
l	19,00
Neck Relief Length	
l1	25,0
Neck Relief Depth	
a	0,15
Corner Radius/Radius	
Cr/r	1,00
Number of Flutes	
Z	3
Shank references standard	
Shank ref.	HA

Materials

Aluminium	
Copper	
Thermoplastic resin	

Coatings

AluSpeed® (HMA)
Alternative Coatings
Uncoated (HM0)

Series normal



This tool is available in 9 diameters and 2 coatings.

Please consider the environment, before printing this document.