

HM

ALU

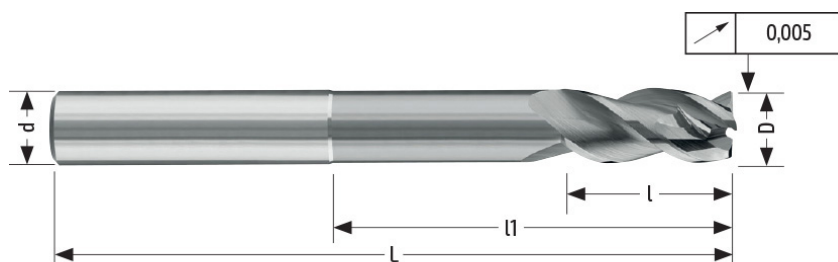
129

Frese per leghe leggere

Visit the online  
Product Sheet

# HMA129100

3 flute end mill, long version with unequal flute spacing

Silmax  
NORM

λ 42°



45°

## Details

|                           |       |
|---------------------------|-------|
| Diameter of cutting edge  |       |
| D h6                      | 10,00 |
| Shank Diameter            |       |
| d h6                      | 10,00 |
| Overall Length            |       |
| L                         | 104   |
| Cutting length            |       |
| l                         | 22,00 |
| Neck Relief Length        |       |
| l1                        | 55,0  |
| Neck Relief Depth         |       |
| a                         | 0,15  |
| Chamfering                |       |
| 45°                       | 0,20  |
| Number of Flutes          |       |
| Z                         | 3     |
| Shank references standard |       |
| Shank ref.                | HA    |

## Materials

|                     |             |
|---------------------|-------------|
| Aluminium           | <div></div> |
| Copper              | <div></div> |
| Thermoplastic resin | <div></div> |

## Coatings

AluSpeed® (HMA)

Alternative Coatings

Uncoated (HM0)

## Series long



This tool is available in 3 diameters and 2 coatings.

Please consider the environment, before printing this document.