



Visit the online  
Product Sheet

HM


TIS

183

Frese per titanio, superleghe e acciaio inox



## HMH183120W

3 flute end mill for high chip removal

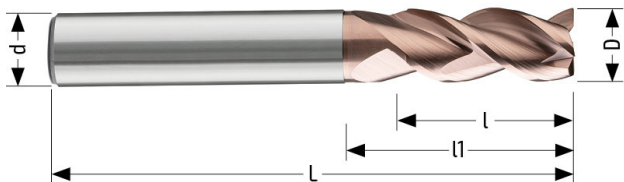

6527 L

$\lambda 42^\circ$



45°

### Details

|                           |       |
|---------------------------|-------|
| Diameter of cutting edge  |       |
| D h10                     | 12,00 |
| Shank Diameter            |       |
| d h6                      | 12,00 |
| Overall Length            |       |
| L                         | 83    |
| Cutting length            |       |
| l                         | 26,00 |
| Neck Relief Length        |       |
| l1                        | 36,0  |
| Neck Relief Depth         |       |
| a                         | 0,20  |
| Chamfering                |       |
| 45°                       | 0,15  |
| Number of Flutes          |       |
| Z                         | 3     |
| Shank references standard |       |
| Shank ref.                | HB    |

### Materials

|                            |             |
|----------------------------|-------------|
| Ferritic/Martensitic steel | <div></div> |
| Austenitic steel           | <div></div> |
| PH Duplex                  | <div></div> |

### Coatings

Balinit® Tisaflex (HMH)

### Alternative Coatings

### Series normal



This tool is available in 13 diameters.

Please consider the environment, before printing this document.