

HM

ALU

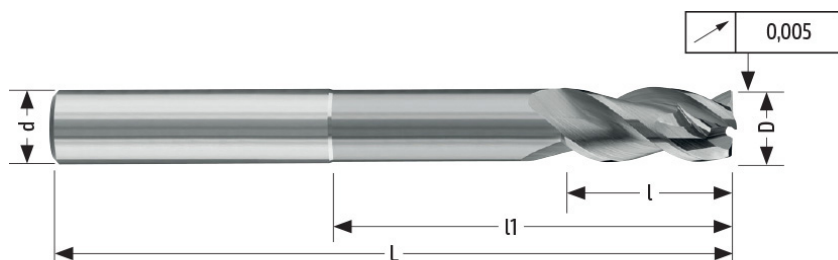
129

Frese per leghe leggere

Visit the online
Product Sheet

ALU | 129

3 flute end mill, long version with unequal flute spacing

Silmax
NORM $\lambda 42^\circ$ 

45°

Materials

Aluminium



Copper



Thermoplastic resin



Coatings

Uncoated (HM0)

AluSpeed® (HMA)

Series long



6 Articoli | 2 Pages | This tool is available in 3 diameters and 2 coatings.



Please consider the environment, before printing this document.

D h6	d h6	L	l	l1	a	45°	Z	Shank ref.	Coatings	Code
10,00	10,00	104	22,00	55,0	0,15	0,20	3	HA	Uncoated (HM0)	HM0129100
12,00	12,00	110	26,00	64,0	0,20	0,25	3	HA	Uncoated (HM0)	HM0129120
16,00	16,00	130	32,00	75,0	0,20	0,30	3	HA	Uncoated (HM0)	HM0129160
10,00	10,00	104	22,00	55,0	0,15	0,20	3	HA	AluSpeed® (HMA)	HMA129100
12,00	12,00	110	26,00	64,0	0,20	0,25	3	HA	AluSpeed® (HMA)	HMA129120
16,00	16,00	130	32,00	75,0	0,20	0,30	3	HA	AluSpeed® (HMA)	HMA129160