

Silsaving

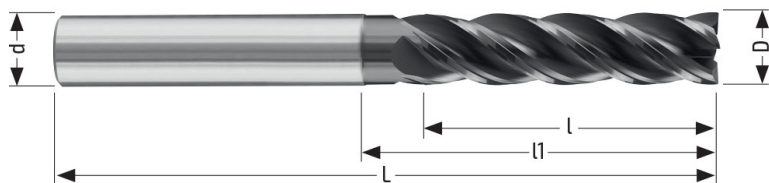
Frese alte prestazioni

892SL

Visit the online
Product Sheet

892SL

4 flute end mill long version with unequal flute spacing

**Silmax**
NORM $\lambda 38^\circ$ 

Materials

Steel < 800 n/mm²Steel < 1000 n/mm²Steel < 1300 n/mm²

Coatings

Balinit® Alcrona (HMG)

Series long



16 Articoli | 2 Pages | This tool is available in 8 diameters.

Please consider the environment, before printing this document.

D h10	d h6	L	l	l1	a	45° '+0,05/+0	Z	Shank ref.	Coatings (Balinit®)	Code
5,00	6,00	74	20,00	25,0	0,10	0,10	4	HA	Alcrona (HMG)	892SL D. 5
5,00	6,00	74	20,00	25,0	0,10	0,10	4	HB	Alcrona (HMG)	892SLW D. 5
6,00	6,00	74	24,00	30,0	0,15	0,10	4	HA	Alcrona (HMG)	892SL D. 6
6,00	6,00	74	24,00	30,0	0,15	0,10	4	HB	Alcrona (HMG)	892SLW D. 6
8,00	8,00	80	32,00	40,0	0,15	0,15	4	HA	Alcrona (HMG)	892SL D. 8
8,00	8,00	80	32,00	40,0	0,15	0,15	4	HB	Alcrona (HMG)	892SLW D. 8
10,00	10,00	87	40,00	46,0	0,15	0,15	4	HA	Alcrona (HMG)	892SL D.10
10,00	10,00	87	40,00	46,0	0,15	0,15	4	HB	Alcrona (HMG)	892SLW D.10
12,00	12,00	105	48,00	58,0	0,20	0,15	4	HA	Alcrona (HMG)	892SL D.12
12,00	12,00	105	48,00	58,0	0,20	0,15	4	HB	Alcrona (HMG)	892SLW D.12
14,00	14,00	105	48,00	58,0	0,20	0,15	4	HA	Alcrona (HMG)	892SL D.14
14,00	14,00	105	48,00	58,0	0,20	0,15	4	HB	Alcrona (HMG)	892SLW D.14
16,00	16,00	120	64,00	68,0	0,20	0,20	4	HA	Alcrona (HMG)	892SL D.16
16,00	16,00	125	64,00	68,0	0,20	0,20	4	HB	Alcrona (HMG)	892SLW D.16
20,00	20,00	125	70,00	80,0	0,20	0,20	4	HA	Alcrona (HMG)	892SL D.20
20,00	20,00	160	70,00	80,0	0,20	0,20	4	HB	Alcrona (HMG)	892SLW D.20