

Silsaving


Frese alte prestazioni

895S


Visit the online
Product Sheet

895S

4 flute end mill regular version with variable helix and unequal flute spacing

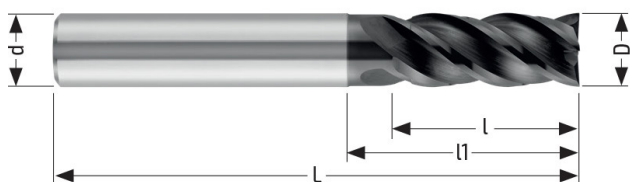

6527 L

 $\lambda 38^\circ$
 $\lambda 40^\circ$ 

45°

Materials

Steel < 800 n/mm²Steel < 1000 n/mm²Steel < 1300 n/mm²

Grey cast iron



Coatings

Balinit® Alcrona (HMG)

Series normal



22 Articoli | 2 Pages | This tool is available in 11 diameters.



Please consider the environment, before printing this document.

D h10	d h6	L	I	l1	a	45° +0,05/+0	Z	Shank ref.	Coatings (Balinit®)	Code
3,00	6,00	57	8,00	—	—	0,05	4	HA	Alcrona (HMG)	895S D. 3
3,00	6,00	57	8,00	—	—	0,05	4	HB	Alcrona (HMG)	895SW D. 3
4,00	6,00	57	11,00	16,0	0,10	0,05	4	HA	Alcrona (HMG)	895S D. 4
4,00	6,00	57	11,00	16,0	0,10	0,05	4	HB	Alcrona (HMG)	895SW D. 4
5,00	6,00	57	13,00	18,0	0,10	0,05	4	HA	Alcrona (HMG)	895S D. 5
5,00	6,00	57	13,00	18,0	0,10	0,05	4	HB	Alcrona (HMG)	895SW D. 5
6,00	6,00	57	13,00	20,0	0,15	0,05	4	HA	Alcrona (HMG)	895S D. 6
6,00	6,00	57	13,00	20,0	0,15	0,05	4	HB	Alcrona (HMG)	895SW D. 6
8,00	8,00	63	19,00	25,0	0,15	0,05	4	HA	Alcrona (HMG)	895S D. 8
8,00	8,00	63	19,00	25,0	0,15	0,05	4	HB	Alcrona (HMG)	895SW D. 8
10,00	10,00	72	22,00	30,0	0,15	0,05	4	HA	Alcrona (HMG)	895S D.10
10,00	10,00	72	22,00	30,0	0,15	0,05	4	HB	Alcrona (HMG)	895SW D.10
12,00	12,00	83	26,00	36,0	0,20	0,05	4	HA	Alcrona (HMG)	895S D.12
12,00	12,00	83	26,00	36,0	0,20	0,05	4	HB	Alcrona (HMG)	895SW D.12
14,00	14,00	83	26,00	36,0	0,20	0,05	4	HA	Alcrona (HMG)	895S D.14
14,00	14,00	83	26,00	36,0	0,20	0,05	4	HB	Alcrona (HMG)	895SW D.14
16,00	16,00	92	32,00	42,0	0,20	0,05	4	HA	Alcrona (HMG)	895S D.16
16,00	16,00	92	32,00	42,0	0,20	0,05	4	HB	Alcrona (HMG)	895SW D.16
18,00	18,00	92	32,00	42,0	0,20	0,05	4	HA	Alcrona (HMG)	895S D.18
18,00	18,00	92	32,00	—	—	0,05	—	HB	Alcrona (HMG)	895SW D.18
20,00	20,00	104	38,00	52,0	0,20	0,05	4	HA	Alcrona (HMG)	895S D.20
20,00	20,00	104	38,00	52,0	0,20	0,05	4	HB	Alcrona (HMG)	895SW D.20