

HMP

PHG

3825


Punte a gradino



Visit the online
Product Sheet

PHG | 3825

Step drill for core drill sizes for taps with internal coolant

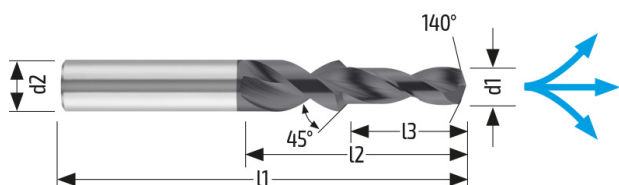

Silmax
NORM

 $\lambda 30^\circ$

2,5d1



140°

Materials

Steel < 1300 n/mm²

Coatings

Balinit® X-Pro (HMX)

14 Articoli | 2 Pages | This tool is available in 14 diameters.



Please consider the environment, before printing this document.

d1 m7	d2 h6	L	l2	l3	Coatings (Balinit®)	Code
3,30	6,00	64	23,0	10,00	X-Pro (HMX)	HMX382510330
3,40	6,00	64	23,0	10,00	X-Pro (HMX)	HMX382510340
4,20	6,00	64	26,0	13,00	X-Pro (HMX)	HMX382510420
4,30	6,00	64	26,0	13,00	X-Pro (HMX)	HMX382510430
5,00	8,00	74	32,0	15,00	X-Pro (HMX)	HMX382510500
5,10	8,00	74	32,0	15,00	X-Pro (HMX)	HMX382510510
6,80	10,00	90	42,0	20,00	X-Pro (HMX)	HMX382510680
6,90	10,00	90	42,0	20,00	X-Pro (HMX)	HMX382510690
7,90	12,00	105	50,0	24,00	X-Pro (HMX)	HMX382510790
8,50	12,00	105	51,0	25,00	X-Pro (HMX)	HMX382510850
8,65	12,00	105	51,0	25,00	X-Pro (HMX)	HMX382510865
10,25	14,00	107	60,0	30,00	X-Pro (HMX)	HMX382511025
10,40	14,00	107	60,0	30,00	X-Pro (HMX)	HMX382511040
10,50	14,00	120	62,0	32,00	X-Pro (HMX)	HMX382511050