

HMP

PHG

3835


Punte a gradino



Visit the online
Product Sheet

PHG | 3835

Step drill for core drill sizes for taps with internal coolant

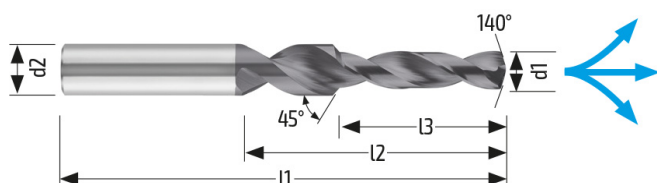

Silmax
NORM

$\lambda 30^\circ$

3,5d1



140°

Materials

Steel < 1300 n/mm²

Coatings

Balinit® X-Pro (HMX)

14 Articoli | 2 Pages | This tool is available in 14 diameters.



Please consider the environment, before printing this document.

d1 m7	d2 h6	L	l2	l3	Coatings (Balinit®)	Code
3,30	6,00	64	27,0	14,00	X-Pro (HMX)	HMX383510330
3,40	6,00	64	27,0	14,00	X-Pro (HMX)	HMX383510340
4,20	6,00	68	31,0	18,00	X-Pro (HMX)	HMX383510420
4,30	6,00	68	31,0	18,00	X-Pro (HMX)	HMX383510430
5,00	8,00	78	38,0	21,00	X-Pro (HMX)	HMX383510500
5,10	8,00	78	38,0	21,00	X-Pro (HMX)	HMX383510510
6,80	10,00	98	50,0	28,00	X-Pro (HMX)	HMX383510680
6,90	10,00	98	50,0	28,00	X-Pro (HMX)	HMX383510690
7,90	12,00	107	60,0	34,00	X-Pro (HMX)	HMX383510790
8,50	12,00	107	61,0	35,00	X-Pro (HMX)	HMX383510850
8,65	12,00	107	61,0	35,00	X-Pro (HMX)	HMX383510865
10,25	14,00	120	72,0	42,00	X-Pro (HMX)	HMX383511025
10,40	14,00	120	72,0	42,00	X-Pro (HMX)	HMX383511040
10,50	14,00	127	75,0	45,00	X-Pro (HMX)	HMX383511050