

Silsaving

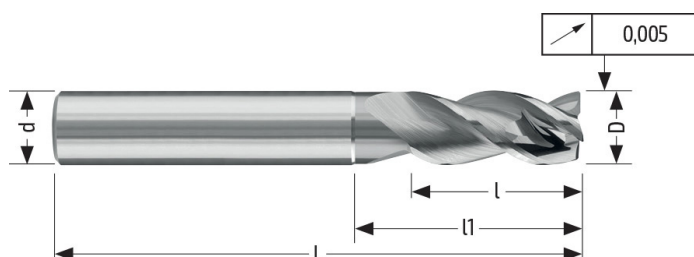
Frese per alluminio

813




Visit the online
Product Sheet

813

3 flute end mill with unequal flute spacing regular version



6527 L

 $\lambda 42^\circ$ 

45°

Materials

Aluminium



Copper



Thermoplastic resin



Coatings

Uncoated (HM0)

Series normal



18 Articoli | 2 Pages | This tool is available in 9 diameters.



Please consider the environment, before printing this document.

D h6	d h6	L	l	l1	a	45° 0,05/+0	Z	Shank ref.	Coatings (Balinit®)	Code
3,00	6,00	57	8,00	—	—	0,05	3	HA	Uncoated (HM0)	813 D. 3
3,00	6,00	57	8,00	—	—	0,05	3	HB	Uncoated (HM0)	813W D. 3
4,00	6,00	57	11,00	—	—	0,05	3	HA	Uncoated (HM0)	813 D. 4
4,00	6,00	57	11,00	—	—	0,05	3	HB	Uncoated (HM0)	813W D. 4
5,00	6,00	57	13,00	—	—	0,05	3	HA	Uncoated (HM0)	813 D. 5
5,00	6,00	57	13,00	—	—	0,05	3	HB	Uncoated (HM0)	813W D. 5
6,00	6,00	57	13,00	20,0	0,15	0,10	3	HA	Uncoated (HM0)	813 D. 6
6,00	6,00	57	13,00	20,0	0,15	0,10	3	HB	Uncoated (HM0)	813W D. 6
8,00	8,00	63	19,00	25,0	0,15	0,15	3	HA	Uncoated (HM0)	813 D. 8
8,00	8,00	63	19,00	25,0	0,15	0,15	3	HB	Uncoated (HM0)	813W D. 8
10,00	10,00	72	22,00	30,0	0,15	0,20	3	HA	Uncoated (HM0)	813 D.10
10,00	10,00	72	22,00	30,0	0,15	0,20	3	HB	Uncoated (HM0)	813W D.10
12,00	12,00	83	26,00	36,0	0,15	0,25	3	HA	Uncoated (HM0)	813 D.12
12,00	12,00	83	26,00	36,0	0,15	0,25	3	HB	Uncoated (HM0)	813W D.12
16,00	16,00	92	32,00	42,0	0,20	0,30	3	HA	Uncoated (HM0)	813 D.16
16,00	16,00	92	32,00	42,0	0,20	0,30	3	HB	Uncoated (HM0)	813W D.16
20,00	20,00	104	38,00	52,0	0,20	0,35	3	HA	Uncoated (HM0)	813 D.20
20,00	20,00	104	38,00	52,0	0,20	0,35	3	HB	Uncoated (HM0)	813W D.20